
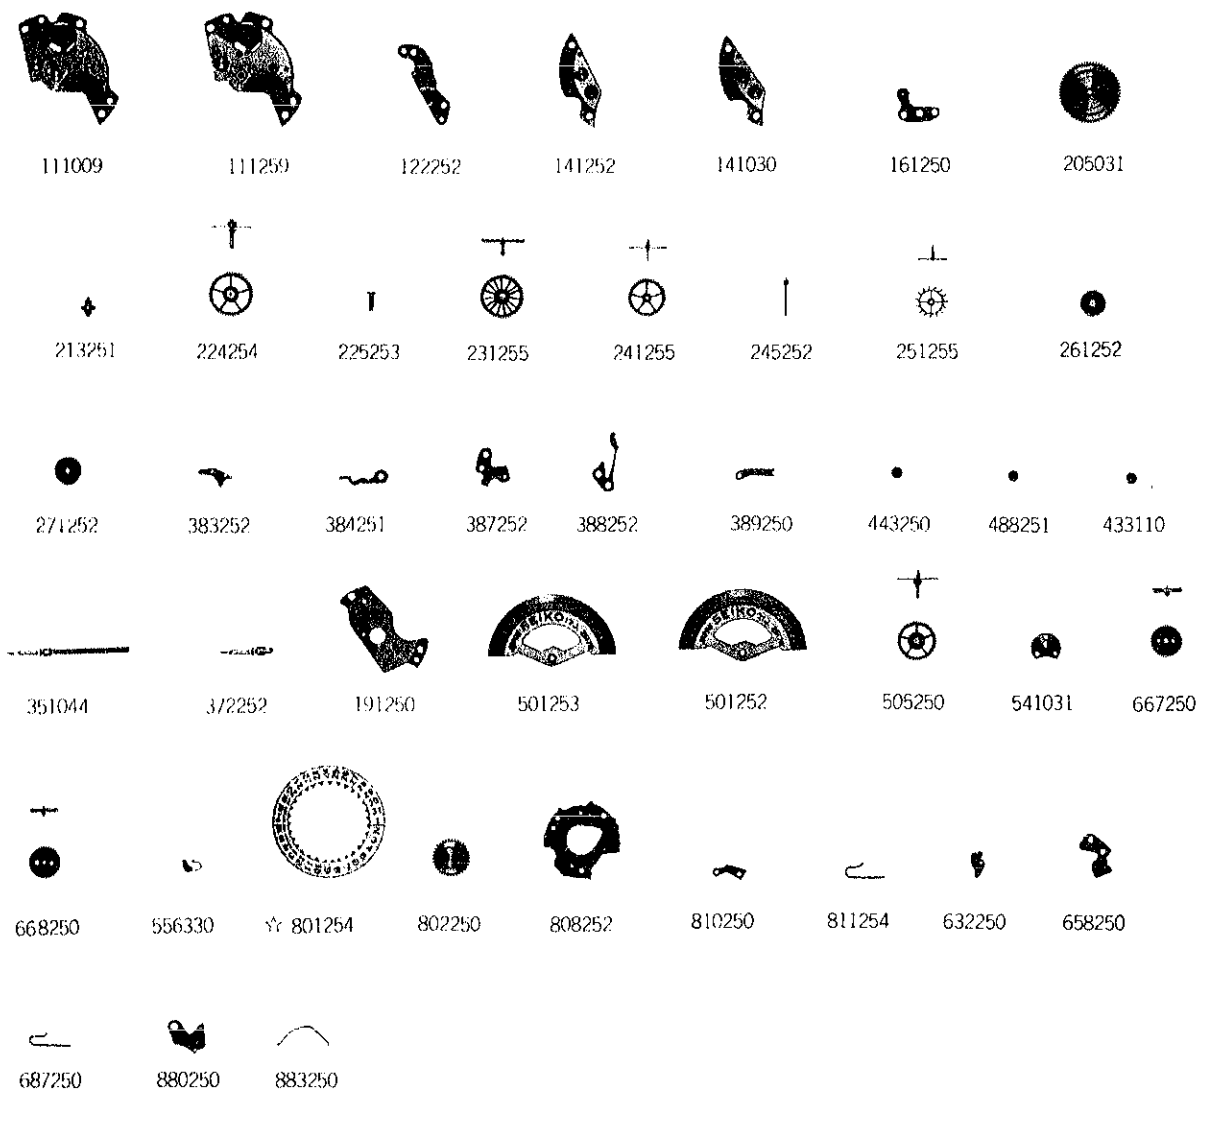
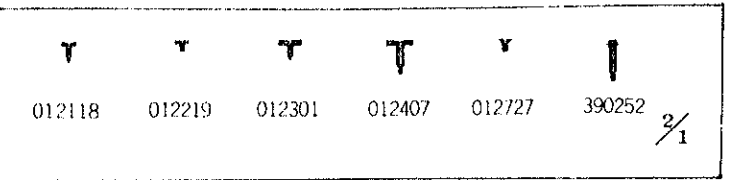


SEIKO

Calibre No. 2517A	Jewels 17j 21j	Style Name (Seikomatic Lady Calendar)
⇨ Basic Calibre 2501A 17J Catalog No. 25-01-1		
 <p>Cal. 2517A</p>		Characteristics Casing diameter: 17.20 ^ø mm Maximum height: 5.65 mm Vibrations per hour: 19,800 Automatic winding with sweep second Calendar (date) Pull & push instant date change "Diashock" Shock Resistant Device
		
		

Catalog No. 25-17-1

Calibre No. 2517A	Jewels 17j 21j	Style Name (Seikomatic Lady Calendar)	
⇨ Basic Calibre 2501A 17J Catalog No. 25-01-1			
PART NO.	LIST OF MATERIALS	PART NO.	LIST OF MATERIALS
111009	Barrel bridge (for 17j)	011212	Diashock cap jewel
111259	Barrel bridge (for 21j)	014417	Diashock spring
122252	Center wheel bridge	501252	Oscillating weight with pinion (for 21j)
141030	Fourth wheel bridge (for 21j)	501253	Oscillating weight with pinion (for 17j)
141252	Fourth wheel bridge (for 17j)	505250	Transmission wheel
161250	Pallet cock (for 21j)	541031	Oscillating weight axle
161251	Pallet cock (for 17j)	545030	Oscillating weight fork
171250	Balance cock	667250	First locking wheel
191250	Framework for automatic device	668250	Second locking wheel
205031	Complete barrel with arbor	556330	Date finger
213251	Barrel arbor	632250	Date corrector finger
224254	Center wheel & pinion with cannon	658250	Date corrector guard
225253	Cannon pinion	687250	Date corrector finger spring
231255	Third wheel & pinion	☆ 801254	Date dial
241255	Fourth wheel & pinion	802250	Date driving wheel
245252	Sweep second pinion	808252	Date dial guard
251255	Escape wheel & pinion	810250	Date jumper
261252	Minute wheel	811254	Date jumper spring
271252	Hour wheel	880250	Date corrector
281250	Setting wheel	883250	Date corrector spring
282250	Clutch wheel	012118	Barrel bridge screw, short
283250	Winding pinion	012118	Fourth wheel bridge screw
284250	Crown wheel	012118	Balance cock screw
285250	Ratchet wheel	012118	Setting lever axle spring screw
301250	Jewelled pallet fork & staff	012120	Dial screw
310250	Balance complete with stud	012121	Stud screw
315250	Balance staff	012204	Pallet cock screw
331180	Roller with jewel	012219	Center wheel bridge screw
341250	Regulator	012241	Framework screw for automatic device
345250	Stud holder	012252	Barrel bridge screw, long
351044	Winding stem	012301	Date corrector spring screw
372252	Joint stem (movement portion)	012407	Case screw
373250	Joint stem (case portion)	012501	Crown wheel screw
381030	Click	012642	Click screw
382030	Click spring	012711	Screw for oscillating weight axle
383252	Setting lever	012727	Minute wheel bridge screw
384251	Yoke (Clutch lever)	012727	Date dial guard screw
385250	Yoke spring (Clutch lever spring)	012727	Date corrector guard screw
387252	Minute wheel bridge	012744	Screw for oscillating weight fork
388252	Setting lever spring	011152	Upper hole jewel for center wheel
389250	Setting lever axle spring	011153	Lower hole jewel for center wheel
390252	Setting lever axle	011710	Lower hole jewel for sweep second pinion
401030	Mainspring with slipping attachment (self-greasing)	011322	Lower hole jewel for escape wheel
443250	Upper hole jewel with frame for 4th wheel (for 21j)	011505	Upper hole jewel for pallet (for 21j)
488251	Upper hole jewel with frame for sweep second pinion (for 21j)	011505	Lower hole jewel for pallet (for 21j)
433110	Upper hole jewel with frame for escape wheel	011157	Upper hole jewel for transmission wheel
481250	Crown wheel ring	011157	Lower hole jewel for transmission wheel
491180	Dial washer	011422	Upper hole jewel for 1st locking wheel
014413	Diashock upper frame	011422	Upper hole jewel for 2nd locking wheel
014414	Diashock lower frame	011422	Lower hole jewel for 2nd locking wheel
014415	Diashock hole jewel with frame	013106	Tube for minute wheel bridge screw, (Cylinder type)
		013113	Tube for bridge screw, short
		013175	Tube for minute wheel bridge screw, (Recessed type)
		013176	Tube for bridge screw, long
Remarks :			
Date dial			
☆ 801254.....Used when both the crown and the date frame are located at 3 o'clock			
If the date dial of this calibre is required in any other type, specify ① the Cal. No. ② the crown position			
③ the date frame position and ④ the dial No.			

☆⇨Please see remarks on the reverse page.

As for all other parts not shown here, please refer to the basic calibre (Cal. No. **2501A** 17J Catalog No. 25-01-1 Red page).

☆⇨Please see remarks.

Items in light letters are not shown in photos; those parts are interchangeable with the basic calibre

(Cal. No. **2501A** 17J Catalog No. 25-01-1 Red page).